



KC32T02

High Efficiency Multi Crystalline Photovoltaic Module


(JET certified module, IEC61215 standard)

Highlights of Kyocera Photovoltaic Modules

Kyocera's advanced cell processing technology and automated production facilities produce a highly efficient multi crystalline photovoltaic module. These cells are encapsulated between a tempered glass cover and pottant with back sheet to provide efficient protection from the severest environmental conditions. The entire laminate is installed in an anodized aluminum frame to provide structural strength and ease of installation.

Electrical Specifications

MODEL	KC32T02
Maximum Power	32W
Tolerance	+15% / -5%
Maximum Power Voltage	17.4V
Maximum Power Current	1.84A
Open Circuit Voltage	21.7V
Short Circuit Current	1.99A
Dimension	517 X 512 X 17 mm
Mass	2.8kg

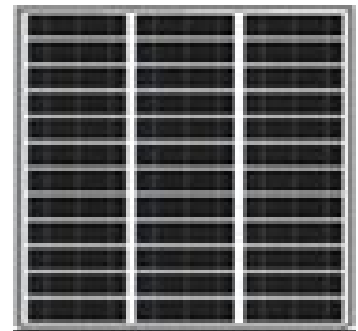

Warranty

2 years limited warranty on material and workmanship

10 years limited warranty on power output

Physical Specifications

